

Deka® High Rate

45HR2000

- Exclusive IPF® technology optimizes power capacity, cell consistency, and long-term reliability
- Advanced AGM technology for superior high-rate power
- Puncture resistant micro-porous glass mat separators extend life
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy-sealed posts eliminate leaks
- Flame arresting, low pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Plate thickness optimized for long life
- Guaranteed 100% initial string capacity when tested in accordance with IEEE 1188



SPECIFICATIONS

Nominal Voltage: 12-Volts

Rating: 168 Watts/Cell @ 15 min. rate
to 1.67 V.P.C.

Positive Plate: >98% Pure lead with tin-calcium alloy

Negative Plate: Pure lead, calcium alloy

Post Seal: Epoxy-sealed

Terminal: Top access, 1/4" – 20 threaded insert

Case/Cover: Flame-retardant, polypropylene –
UL 94 V-0/>28% L.O.I.

Safety Vent: Low positive pressure,
self-sealing w/ flame arrestor

Float Voltage: 2.25 V.P.C. ± 0.01 V.P.C. @ 77°F (25°C)

Design life: 10 years in float applications @ 77°F (25°C)

Dimensions: Length - 8.99" (228.4 mm)

Width - 5.47" (138.9 mm)




Height - 8.27" (210.1 mm)

Weight: 40 lbs. (18 kg)

DISCHARGE RATINGS IN WATTS PER CELL @ 77°F (25°C)*

| Volts per Cell (V.P.C.) | 1 MIN. | 5 MIN. | 10 MIN. | 15 MIN. | 20 MIN. | 30 MIN. | 40 MIN. | 50 MIN. | 60 MIN. |
|-------------------------|--------|--------|---------|---------|---------|---------|---------|---------|---------|
| 1.60 | 569 | 322 | 222 | 172 | 141 | 105 | 84.5 | 71.5 | 62.3 |
| 1.63 | 548 | 316 | 219 | 170 | 140 | 104 | 84.1 | 71.1 | 62.0 |
| 1.65 | 537 | 312 | 217 | 169 | 139 | 104 | 83.9 | 70.9 | 61.8 |
| 1.67 | 526 | 308 | 216 | 168 | 138 | 104 | 83.6 | 70.7 | 61.6 |
| 1.70 | 500 | 300 | 212 | 166 | 137 | 103 | 83.0 | 70.1 | 61.0 |
| 1.75 | 472 | 286 | 205 | 161 | 134 | 101 | 81.7 | 69.0 | 60.2 |

*Subject to change without notice.

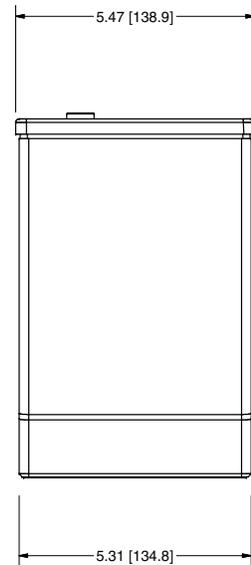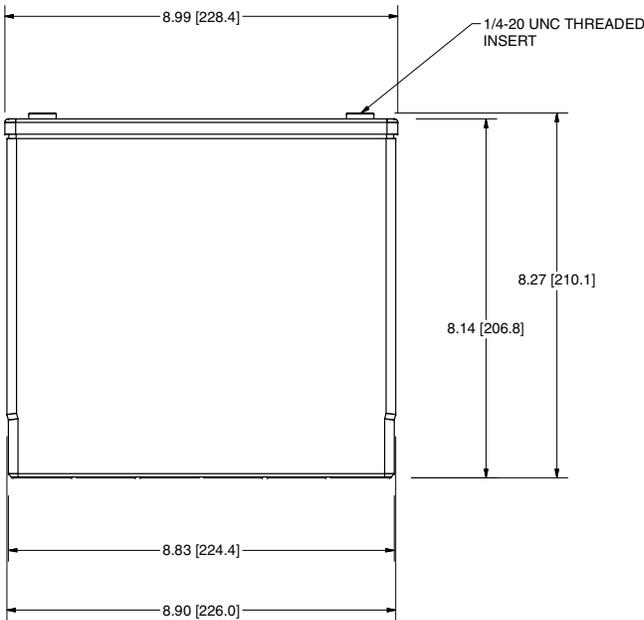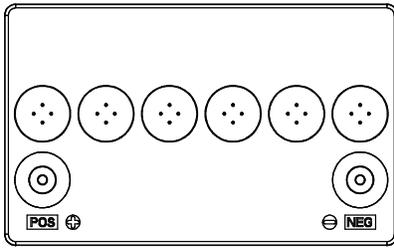

OPTIONAL FACTORY ACCEPTANCE TESTING

- More economical than performing a load test on site
- Confirms published capacity rating of product
- Establishes a factory baseline ohmic reading
- Formal test report provided
- Contact your East Penn Mfg. representative for additional information

TESTING SPECIFICATIONS

- Exceeds IEEE-1188 standards
- 10 minute battery rate to 1.67 V.P.C.
- Constant power discharge
- String \geq 100% capacity — All individual batteries \geq 95% capacity
- Conductance readings taken before the test
- Battery voltage recorded on report every 2 minutes

INSTALLATION AND OPERATING INSTRUCTIONS

<http://www.eastpennmanufacturing.com/wp-content/uploads/High-Rate-10-Manual-0970.pdf>

PROPOSITION 65 WARNING: Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer. **WASH HANDS AFTER HANDLING.**



www.dekabatteries.com

QUALITY SYSTEM
CERTIFIED
ISO 9001
IATF 16949
ENVIRONMENTAL
SYSTEM CERTIFIED
ISO 14001



East Penn Manufacturing Co.

Lyon Station, PA 19536-0147

Phone: 610-682-3263

Fax: 610-682-0891

e-mail: reservecpowersales@dekabatteries.com