


8G4DEI

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	210 Ah
Capacity at C/20	183 Ah
Capacity at C/5	153 Ah
Weight	127.5 lbs. (58 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle	13.8 - 14.6 volts
Float	13.4 - 13.6 volts
Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	Epoxy Insert



UN2794 "Wet Filled with Acid" as defined by DOT (Dept. of Transportation)

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

Length	20.77 (528 mm)
Width	8.44 (214 mm)
Height	9.34 (237 mm) <i>including terminal</i>

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity**

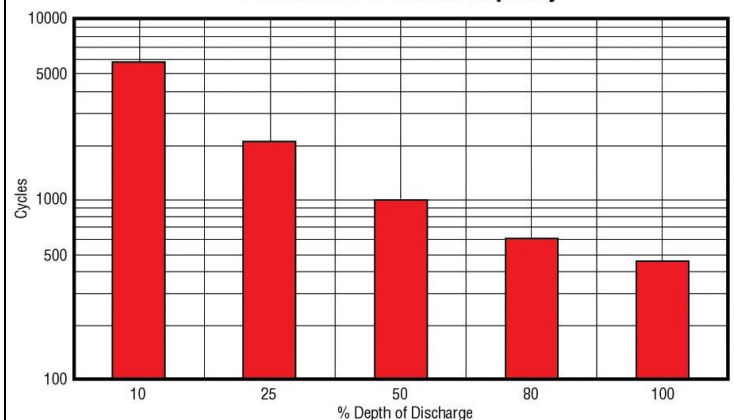

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

