

8L16

SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/100	420Ah
Capacity at C/20	370Ah
Weight	113 lbs. (51 kg)
Operating Temperature Range	-22°F (-30°C) - 122°F (50°C)

For Charging Parameters please refer to
www.mkbattery.com

Click on Resources, then on Renewable Energy Charging
Parameters in the Energy Storage section

Terminal T875



Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:


Flooded Battery, Wet type



DIMENSIONS

Inches (mm)

Length	11.75 (298 mm)
Width	6.82 (173 mm)
Height	16.50 (419 mm)

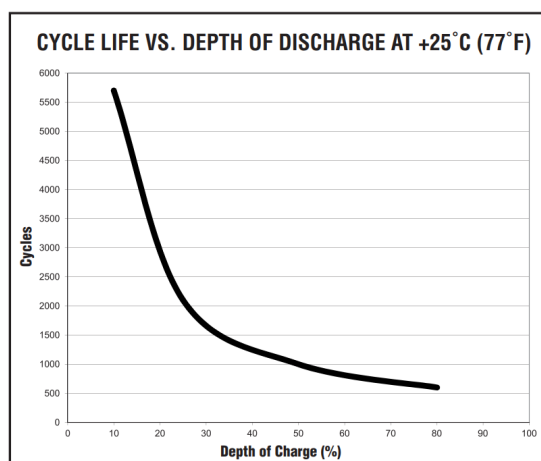

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

